


DESIGN & SPECIFICATION PARAMETERS

TO DESIGN WITH AND SPECIFY AISLE&STEPLITE DETERMINE THE FOLLOWING:

- TYPE
- RUN LENGTH
- MOLDING TYPE
- LENS COLOR
- LAMP SPACING
- VOLTAGE
- MODEL NUMBERING

TYPE

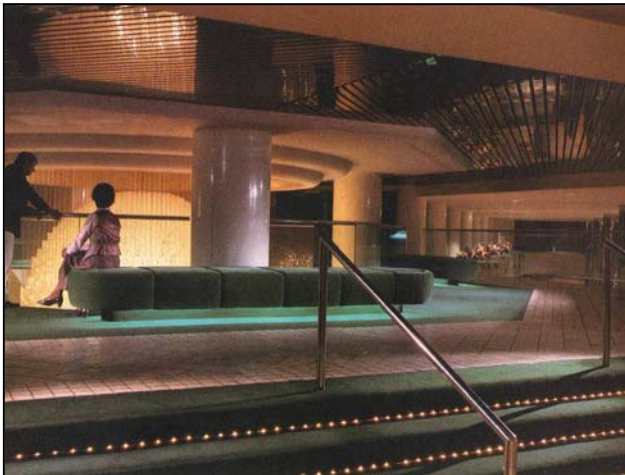

<SL>: STEPS OR LANDINGS



<AL>: AISLES



<WL>: WALLS



<R>: RECESSED


RUN LENGTH

SPECIFY SOMEWHAT LONGER THAN REQUIRED AS AISLE&STEPLITE IS EASILY FIELD-TRIMMABLE. AISLE&STEPLITE CAN BE CUT AND TERMINATED IN THE FIELD, AND BULK ORDERS ARE AVAILABLE. ANY RUN LENGTH IS AVAILABLE, BUT MULTIPLE FEED POINTS MAY BE NECESSARY.


MOLDING TYPE

MOLDINGS ARE EXTRUDED OF SEMI-RIGID PVC AND COME IN SIX FOOT LENGTHS WHICH CAN BE CUT IN THE FIELD WITH A HACKSAW. SEE MOLDINGS. ALL FLOOR-MOUNTED MOLDINGS COME IN DARK BRONZE <DB>. WALL-MOUNTED MOLDINGS COME IN DARK BRONZE <DB>, WHITE <W> AND CLEAR <C>.


MOLDINGS

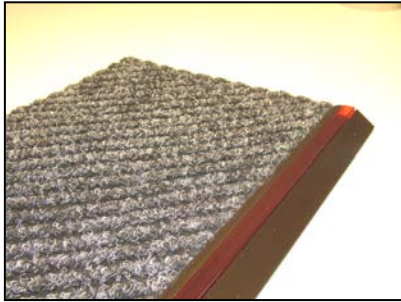


<CF> CARPET TO FLOOR

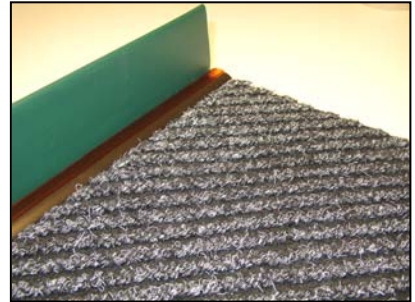

<CW> CARPET TO WALL

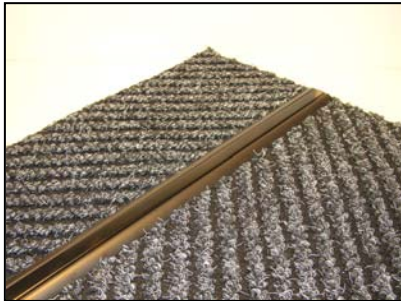

<CC> CARPET TO CARPET

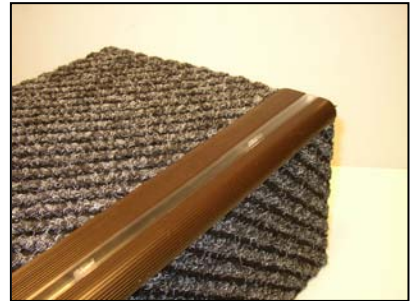

<CS> CARPETED STEP




<U> RECESSED



<W> WALL MOUNTED

LENS COLOR

LENSES ARE MADE OF POLYCARBONATE AND ARE AVAILABLE IN SMOKE <S>, RED <R>, AMBER <A> AND CLEAR <C>.

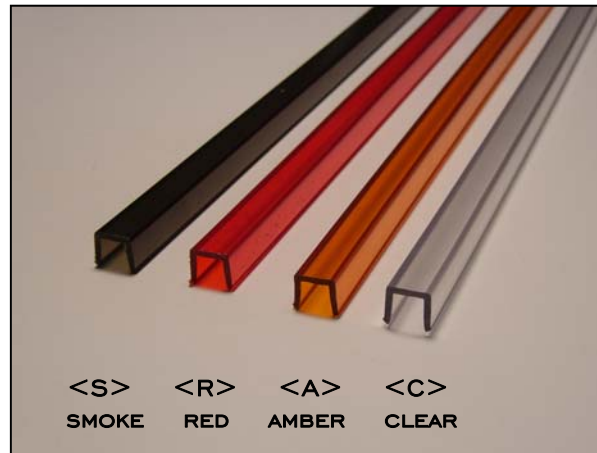

LAMP SPACING*

LAMPS ARE AVAILABLE IN, <2>, <6>, AND <12> INCH AND <C> CUSTOM SPACING. ALL BUT CUSTOM ARE IN STOCK FOR QUICK DELIVERY OF MOST ORDERS. CUSTOM SPACINGS AVAILABLE BY SPECIAL ORDER.

<2> STEPLIGHTING, BULBS CONCEALED.

<6> STEPLIGHTING, BULBS VISIBLE.

<12> AISLELIGHTING, ALL INSTALLATIONS.

*APPLICATIONS AND VIEWING DISTANCES LISTED HERE ARE SUGGESTED ONLY; PERFORM EMPIRICAL TESTING TO DETERMINE OPTIMAL SOCKET SPACING FOR ALL APPLICATIONS.

VOLTAGE

AISLE&STEPLITE IS RATED FOR <24> VOLTS, AND TRANSFORMERS ARE REQUIRED FOR OPERATION. SEE **TRANSFORMERS** FOR MORE INFORMATION. BY OPERATING ON <12> VOLTS, 1) EXTREMELY LONG LAMP LIFE, IN EXCESS OF 100,000 HOURS, CAN BE ACHIEVED, AND 2) THE NEED FOR DIMMERS IS ELIMINATED IN MOST CASES.

MODEL NUMBERING GUIDE

USE THE FORMAT SHOWN IN THIS SECTION TO PRODUCE A MODEL NUMBER FOR THE AISLE&STEPLITE SYSTEM YOU HAVE SPECIFIED:

SAMPLE MODEL NUMBER

<ASL> - <AL> - <75'0" > - <CF> - <C> - <12> - <24>

FIXTURE SERIES	TYPE	RUN LENGTH	MOLDING TYPE	LENS COLOR	LAMP SPACING	VOLTAGE
ASL	AL	ANY LENGTH RUN (MULTIPLE FEED POINTS MAY BE REQUIRED)	CF	C	2	24
	SL		CW	R	6	
	WL		CC	A	12	
	R		CS	S	CUSTOM	
			U			
			W(C,B,W)			